
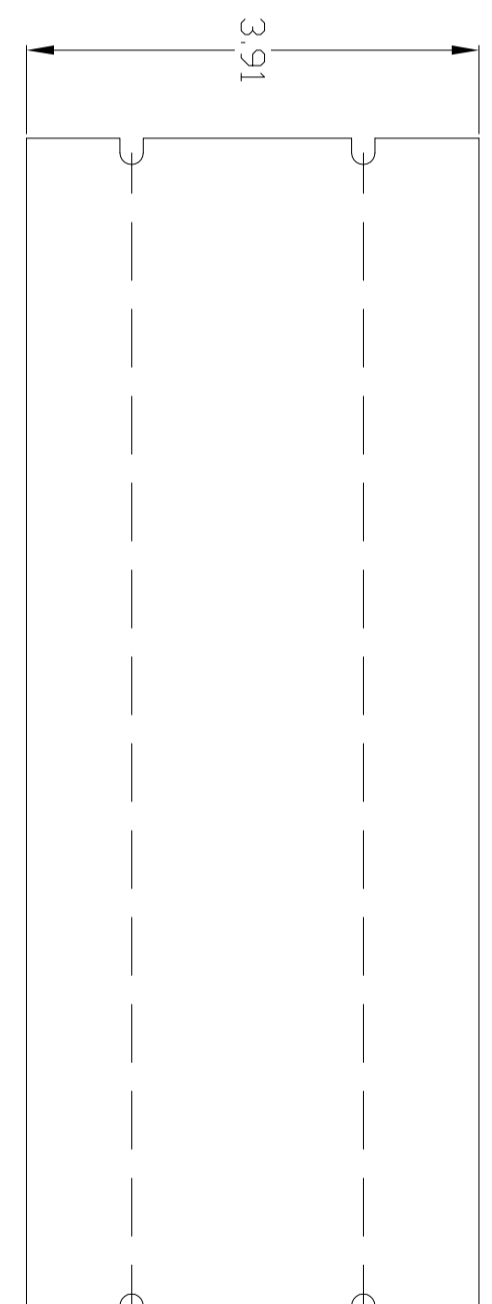
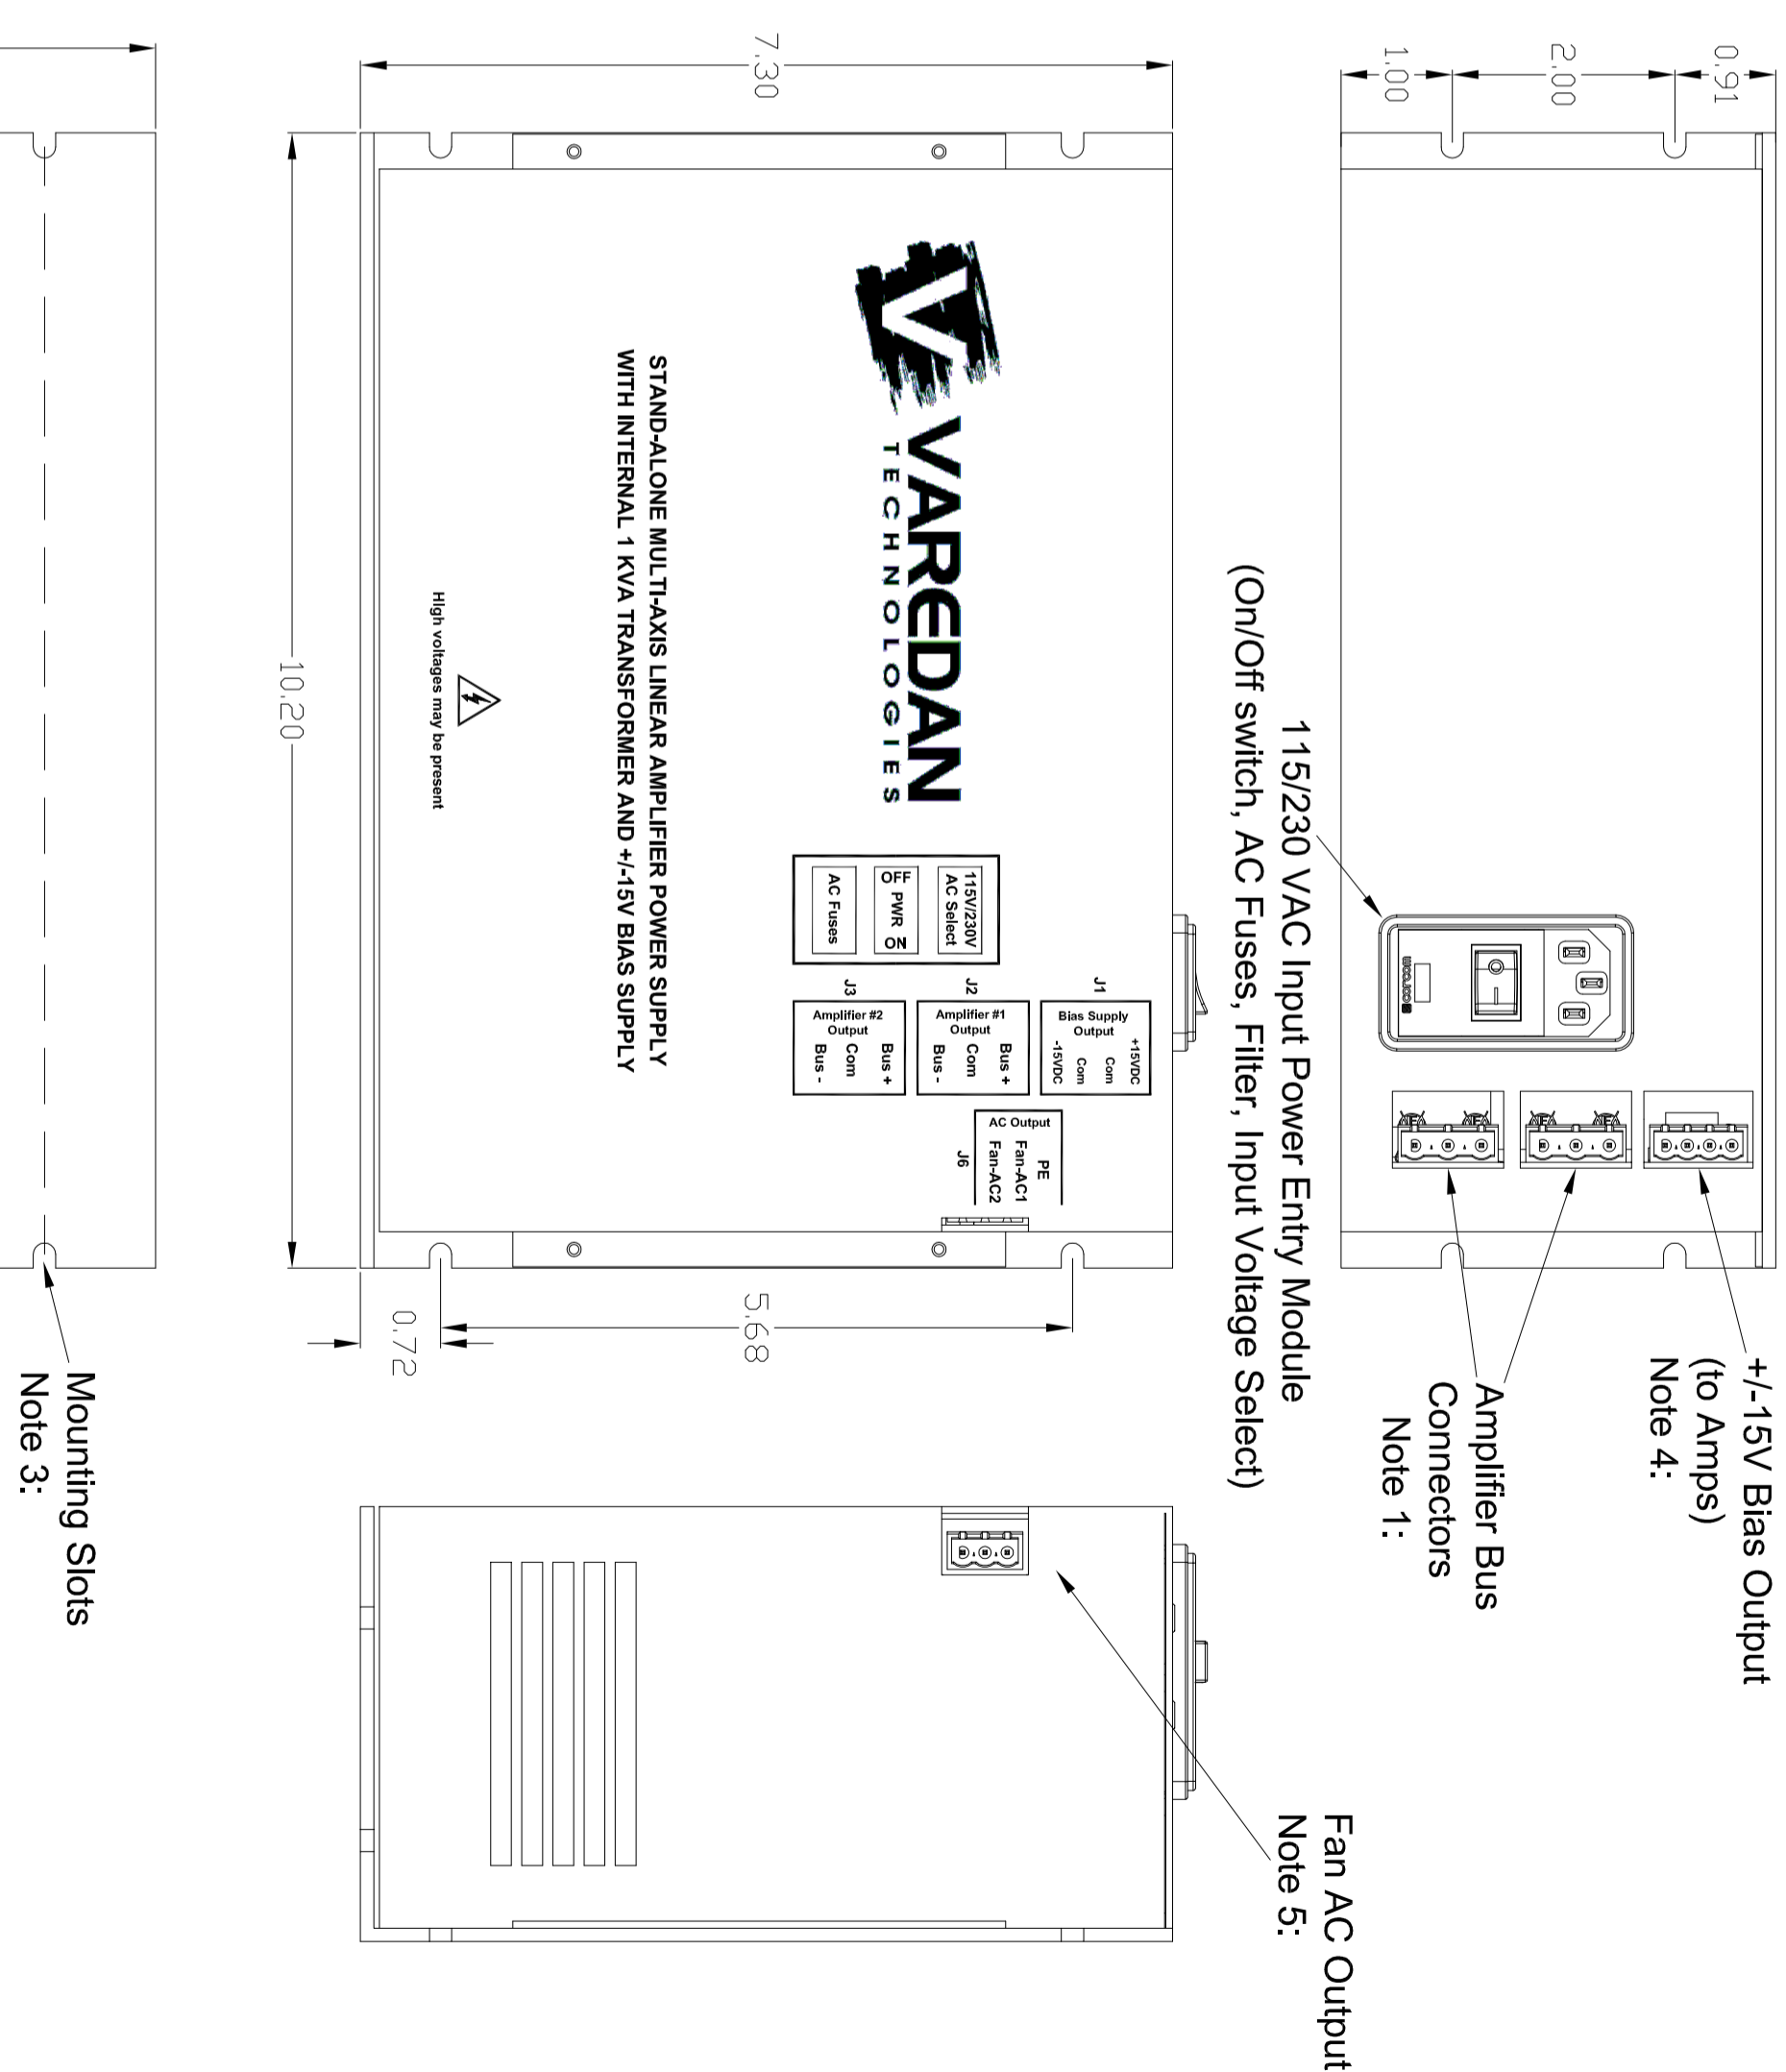


Default AC Input Configuration

- 1) Single-Phase AC Input:
115VAC/230VAC Selectable through power entry module
- 2) AC Input Current = 10A Maximum

Default DC Output Configuration

- 1) Standard DC Output Voltage:
+/- 60VDC
Other voltage options available. Contact Factory
- 2) DC Output Current:
(For each Amplifier Output)
10A Continuous
25A Peak
Total continuous output power should not exceed 1KVA

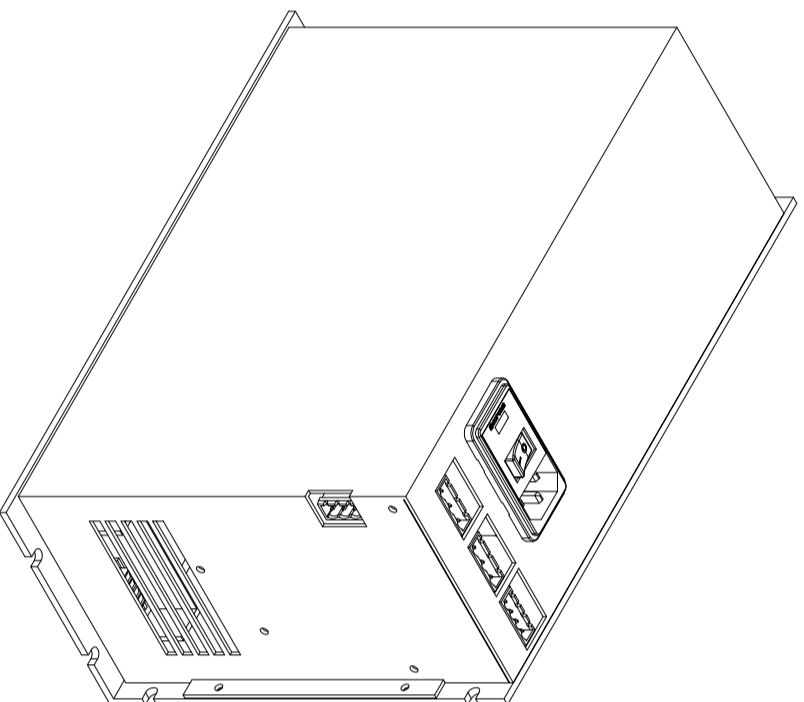

Mounting Slots
Note 3:

- Notes:**
- 0) All dimensions in Inches.
 - 1) DC Bus to amplifiers:
Mate = OnShore EDZ960/3
Output Fuses = 10A 3AG
 - 2) AC Input:
Connector type = IEC 320-C14
Voltage = 115VAC/230VAC selectable (see note 5)
Input Fuses = 10A 3AG
 - 3) Mounting slots take up to #10 machine screw.
 - 4) Bias supply output.
Daisy chain Bias output to amplifiers.
Mate = Phoenix 1757035
 - 5) AC Output for Fans:
115VAC output for both AC input options.
115VAC fans must be used.
Mate = TE 796634-3
 - 6) Remove cover to access DC Bus fuses.

REVISIONS			
ECO	REV	DESCRIPTION	DATE
-	A	Original Preliminary Release.	1-15-16
	B	Increase package height 0.3in, Note 115VAC output on fan connector	1-19-16



Title: 1KVA Stand-Alone Power Supply

Part Number: 4065-36-001

Date: Jan 8, 2016

Filename: 4065-36-001.DWG

3860 Del Amo Blvd.
Suite 401
Torrance, CA 90503
Tel (310) 542-2320
Fax (310) 542-2344

Document Rev. B

Drawn by: T.W.C.

Sheet 1 of 1

(c) Copyright 2001 Varedan Technologies. This drawing is the property of Varedan Technologies and may not be reproduced whole or in part, disclosed to others, used for manufacturing or any other purpose without prior written permission from Varedan Technologies.